





BENQ DX808ST

Keunggulan


Desain Premium Sensor Anti Debu (Dustproof) dengan Filter Penyaring 90% Partikel Debu

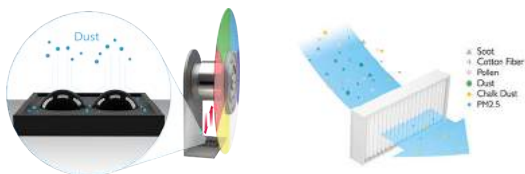

SmartEco (Teknologi penghemat energi)

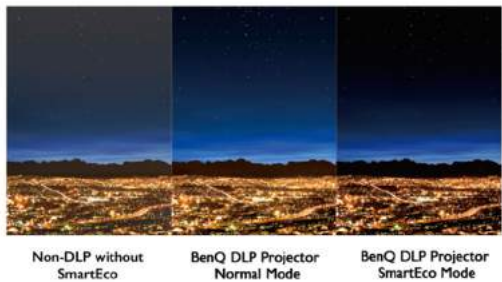


Ketahanan Kualitas Gambar yang dihasilkan dengan Teknologi DLP

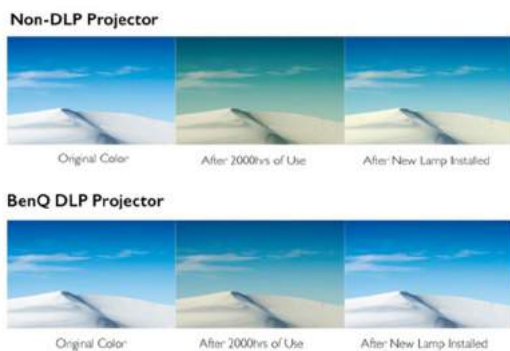

Dengan Software QWrite Interactive Solution




Short Throw (Jarak tembak pendek 1-1,5 meter untuk menghasilkan proyeksi hingga ukuran 100 inch)

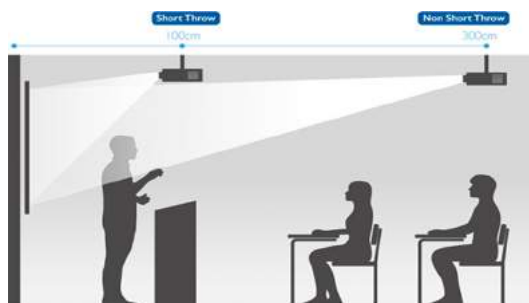

Desain khusus untuk Pendidikan/Pembelajaran



Ketajaman Proyeksi Teknologi DLP

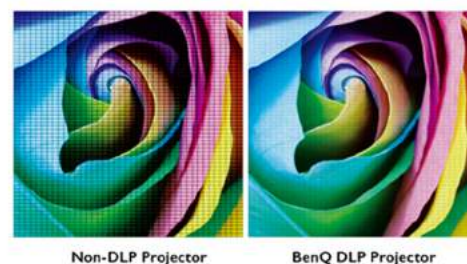

Fitur Produk




Proyeksi interaktif bisa sebagai desktop ataupun whiteboard digital




Desktop

Whiteboard Digital


Presentasi powerpoint lebih interaktif

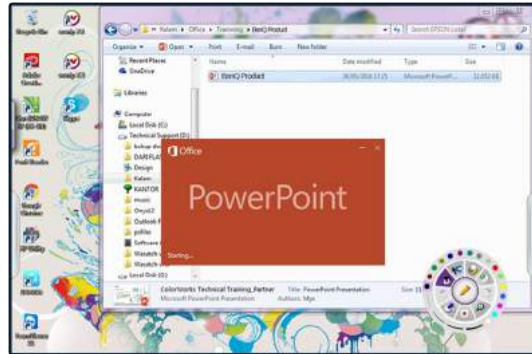

Pilihan background pada layar

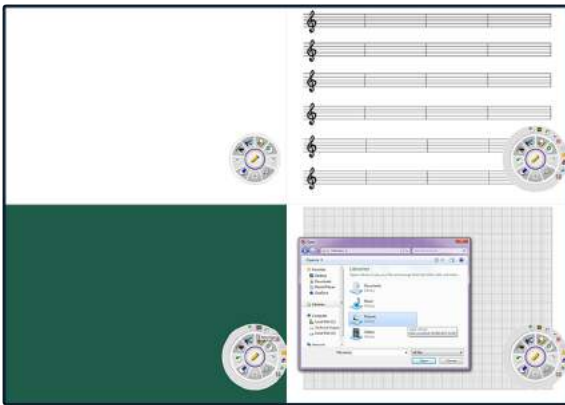


Mengubah ukuran objek (Resize)

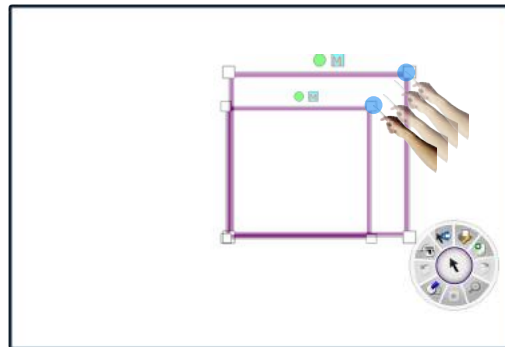

Kegiatan pembelajaran dapat direkam



Merotasi/memutar objek (Rotate)

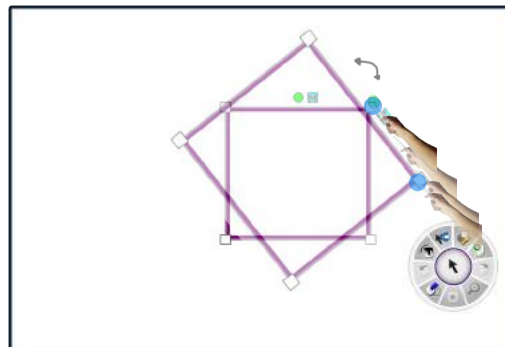

Memperbesar/memperkecil tampilan (Zoom)



PROJECTOR

BENQ DX808ST



Projection System	DLP Single 0.55" XGA
Native Resolution	1024 x 768 pixels
Brightness (ANSI Lumens)	3,000 ANSI Lumens
Contrast Ratio	20,000:1
Display Color	1.07 Billion
Lens	F/#=2.6, f=6.9mm
Aspect Ratio	Native 4:3 (5 aspect ratio selectable)
Throw Ratio	0.61
Image Size (Diagonal)	60"~120"
Zoom Ratio	Fixed
Keystone Adjustment	1D; Vertical \pm 30 degrees
Resolution Support	VGA(640 x 480) to WUXGA_RB(1920 x 1200) * RB= Reduced blanking
Horizontal Frequency	15K -102KHz
Vertical Scan Rate	23-120Hz
HDTV Compatibility	480i, 480p, 576i, 576p, 720p, 1080i, 1080p
Weight	2.7 kg
Dimensions (W x H x D mm)	320*120*239 mm
Interface	HDMI x1, PC In (D-sub 15pin) x 2 (share with component video), Monitor Out (D-sub 15pin) x 1, RS232 (DB-9pin) x 1, USB (type A) x1 (power only 5V/1.5A), USB (type mini B) x 1, IR Receiver x2 (front, top)
Power Consumption	Standby <0.5W
Audible Noise (Normal/Economic Mode)	36/32dBA
Power Supply	AC100V to 240V, 50Hz to 60Hz
Light Source	Lamp (200W)
Light Source Life	5000/10000/10000/15000 hours (Normal/Eco/SmartEco/Lampsave mode)
Operating Temperature	0° ~ 40°C

BRACKET

Tilt Angle	Up to +/- 10
Screw Type	M4
Weight Capacity	12 kg
Max. Adujstable Wall Projection Distance	1270 mm
Equipement	Steel/Alumunium Alloy
Dimension	110 x 215 x 1368 mm
Weight (Without Packing/With Packing)	5.1 kg

Head Office.

Ruko Sampoerna Square No. 15
 Jl. Raya Hankam, Jatisampurna - Bekasi 17433
 Telp. (021) 22813394 | info@mandiarihasolusi.co.id
 www.mandiarihasolusi.co.id