CONFERENCE

71.98.0396

D-CERNO DISCUSS D

D-Cerno Delegate Discussion Unit

Description

D-Cerno DISCUSS combines sleek design with advanced digital signal processing and true plug-and-play operation.

> **Stylish**, **discreet**, and **unobtrusive**, the low-profile D-Cerno DISCUSS D blends seamlessly into any meeting room environment.

Built entirely on digital signal processing, the system delivers **crystal-clear audio** and outstanding speech intelligibility — two essential foundations for productive meetings.

In today's interconnected world, reliable communication is critical. That's why D-Cerno DISCUSS D features a shielded microphone that provides excellent **immunity to mobile phone interference**, allowing delegates to stay focused on what truly matters.

Designed for immediate use straight **out of the box**, D-Cerno DISCUSS D requires minimal technical expertise. Installation is simple: connect shielded Cat-5 cables from unit to unit. Thanks to **automatic signal-flow detection**, there's no need to worry about IN or OUT ports — cabling errors are virtually eliminated.

D-Cerno also offers exceptional flexibility. Expanding or reducing the number of units is quick and effortless, making the system particularly **well suited for rental applications**.

The D-Cerno DISCUSS D is compatible with **screw-lock D-MIC microphones**, available in different lengths.

Benefits

- Modern, sleek, and contemporary design
- Intuitive button layout with clear visual and tactile feedback
- Removable microphone (not included) with different lengths available
- Compact footprint and detachable microphone for easy transport and storage
- Solid bottom housing for added weight, stability, and durability

Features

- Digital signal processing for clear, intelligible audio
- Shielded microphone providing immunity to mobile phone interference
- High-quality integrated loudspeaker for natural sound reproduction
- Integrated headphone output for private listening
- Adjustable headphone volume control
- Dedicated microphone On/Off button for intuitive operation
- Loop-through, daisy-chain cabling for simple system wiring
- Patented fail-safe redundancy for enhanced system reliability
- Concealed conference bus connections for a clean, professional appearance
- Bi-color bar indicator for clear status visibility
- Microphone On/Off or Request-to-Speak push button with dual signaling LEDs

Connectivity

- Two digital bus connections (IN/OUT - interchangeable)
- Headphone connection:

TEL152 Headphones	71.04.0154

- Screw-lock socket to connect a removable D-MIC microphone:

D-MIC 30 SL	71.98.0053
D-MIC 40 SL	71.98.0054
D-MIC 50 SL	71.98.0055
D-MIC 60 SL	71.98.0056
D-MIC 70 SL	71.98.0057
D-MIC 40 FF Full Flex	71.98.0059
D-MIC 40 BC Cardioid	71.98.0072
D-MIC 40 BC Hypercardioid	71.98.0073

Accessories

- 2-m patch cable is included with the unit
- D-Cerno transport case also available:

D-Cerno AE TC	71.98.0334

Certification

Region	Certification
Europe	CE

Specifications

Mechanical	
Material	PC/ABS & Zamak
Color	Black
Size	211.4 × 136 × 48.2 mm
Size packed	250 × 150 × 90 mm
Weight	780 g
Weight packed	1080 g
Electrical	
Power supply	48 DC, over Cat5e cable
Power consumption	2 W
Audio quality	• 24bit for microphone signal processing • 16 bit for loudspeaker and headphone
Frequency response	25 Hz - 15,000 Hz (± 3 db)
Headphones	
Impedance	16-150 Ω
Output level	Max 70 mW 32 Ω
Speaker	
Rated power	4 W
Mean sound pressure level	80 dB SPL at 1m
Environment	
Operating temperature	5 to 45°C
Humidity	< 95%, >5%

Technical Drawings (mm)

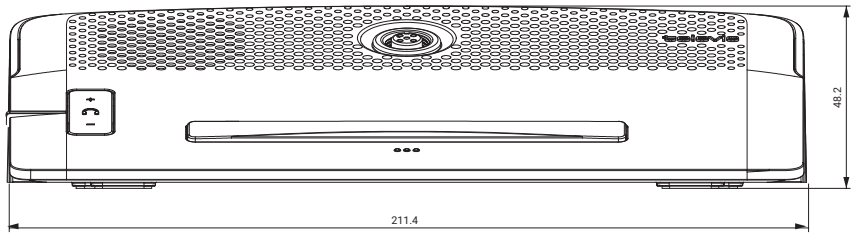

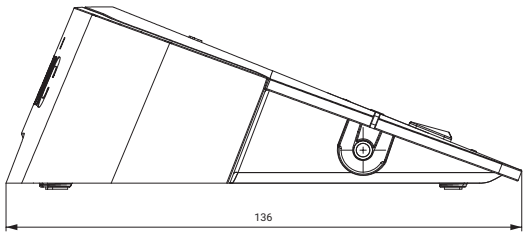

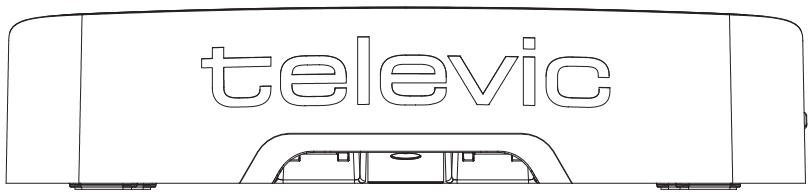

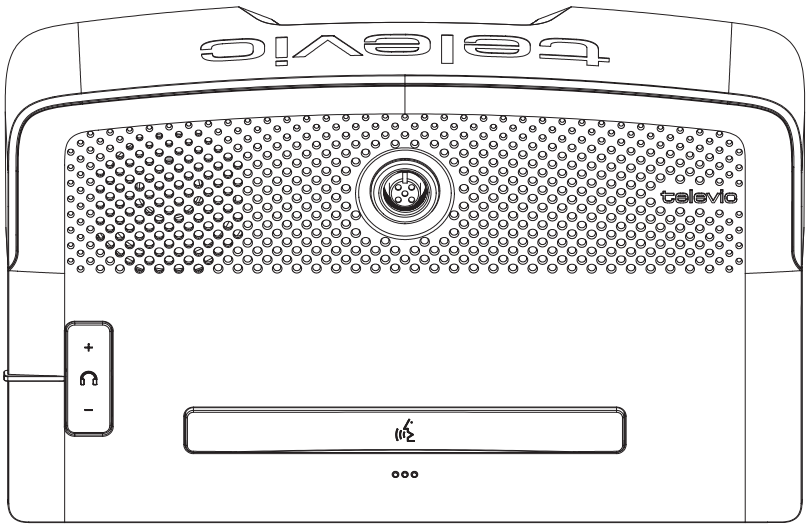

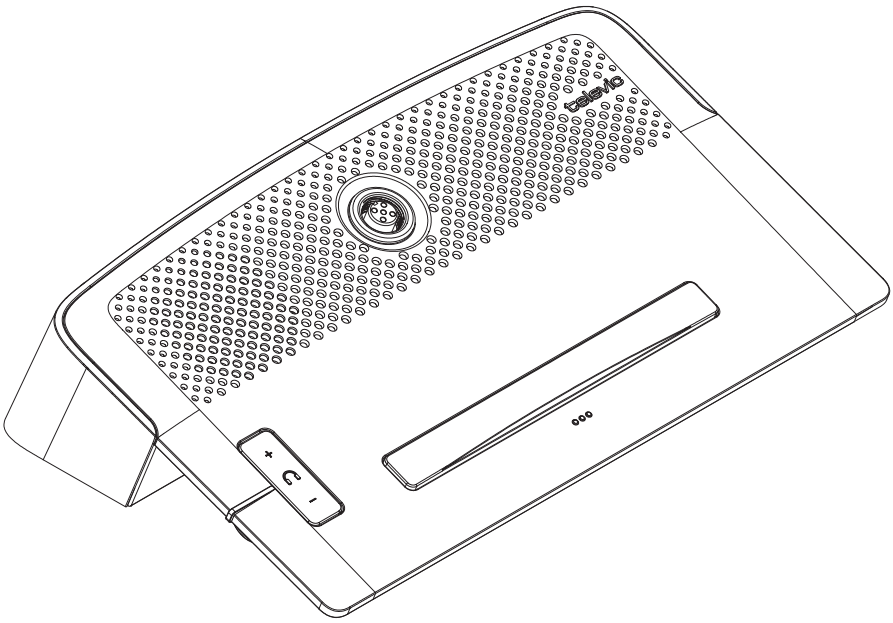

Developing Solutions

Head Office :
Ruko Sampoerna Square No. 15
Jl. Raya Hankam, Jatisampurna
Kranggan - Bekasi 17433

Contact :
(021) 28672601
info@solusisuksespratama.co.id
www.solusisuksespratama.co.id

Solusi Sukses Pratama
@Solusi Sukses Pratama
@SolusiSuksesP